

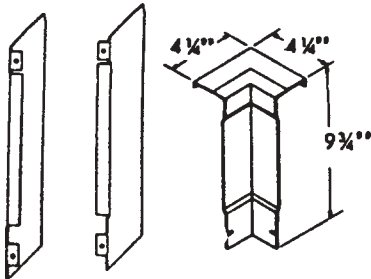



# WEIL-McLAIN

## Cast Iron Radiation



Weil-McLain Snug Cast Iron Baseboards satisfy the standards of good heating engineering. Since it is essential to comfort that the cold outer wall be blanketed as extensively as possible with a source of heat, Weil-McLain baseboard panels most effectively fulfill this requirement.



Panel Length Linear Feet	Hot Water Ratings in BTU/HR* 500 Lbs. Per Hour Flow Rate Average Water Temperatures Between Inlet & Outlet						
	150deg.F	160deg.F	170deg.F	180deg.F	190deg.F	200deg.F	215deg.F
	1/2	195	225	225	285	320	350
1	390	450	510	570	640	700	800

\* All ratings are based on 65 degrees F. entering air temperature.

Description	Size	Code #
Baseboard Complete	1-1/2 ft.	410-0510
Baseboard Complete	2 ft.	410-0515
Baseboard Assembly Left Hand	1-1/2 ft.	410-0610
Baseboard Assembly Left Hand	2 ft.	410-0615
Baseboard Assembly Intermediate	2 ft.	410-0715
Baseboard Assembly Intermediate	6 ft.	410-0755
Baseboard Assembly Right Hand	1 ft.	410-0805
Baseboard Assembly Right Hand	2 ft.	410-0815
Valve Enclosure	5-1/2	410-1000
Plain Enclosure	5-1/2	410-1050
Plain Enclosure	10 inch	410-1055
End Cover Left Hand		410-1100
End Cover Right Hand		410-1105
Inside Corner	4 inch	410-1200
Plain Metal Extension	3 ft.	410-1250
Easy Angle Connector	4 inch	410-1400
Baseboard Assembly Clamp		410-1600

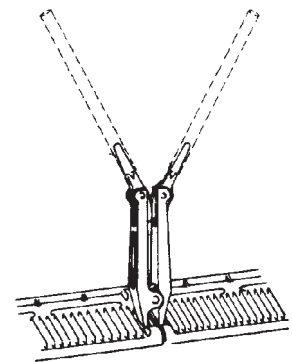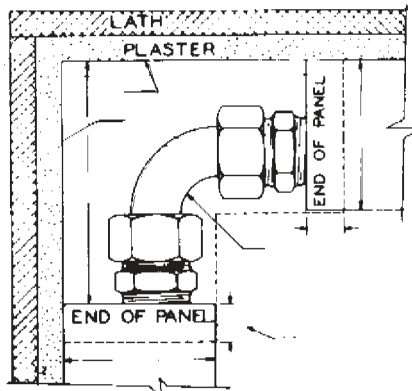

**WEIL-McLAIN****Hardware for Cast Iron Radiation (Extra Parts)**

(Hardware Sets furnished with Cast Iron Radiation to Complete Installation)

Description	Size	Code#
1' TO 6' Accessory Package		410-1700
Wood Screw #12	3"	410-1715
Holding Clip		410-1730
Carriage Bolt	5/16 x 1/4	410-1745
Hex Nut	5/16	410-1760
Cap Screw (Leg)	3/8 x 1-1/2	410-1775
Push Nipple		410-1790
Brown Kraft Paper	(per ft.)	410-1800